
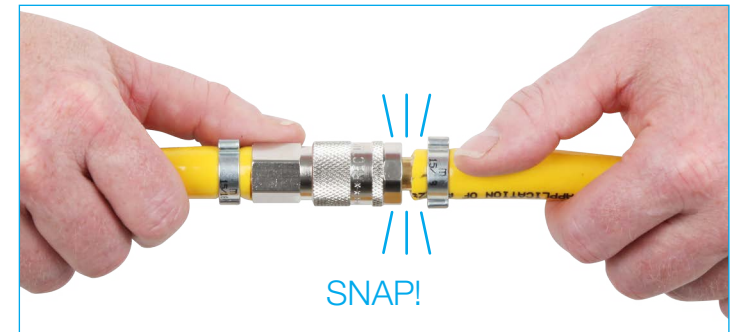


Double-Action Quick Connect Air Fittings

AS1715 and AS1716 require you to use hose joiners that will not come apart if the joiner is caught or snagged. Double Action Quick Connect Couplings avoid this unsafe situation.

To Connect

When the two couplings are separated, the air to the connector is closed off by the internal valve in the air supply side.

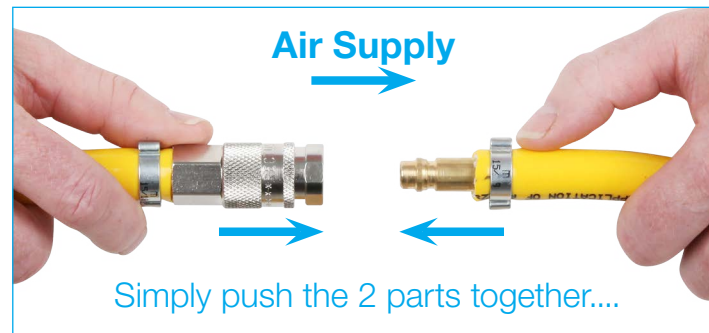

To Disconnect

- 1 Push both hoses towards the coupling
- 2 Pull back the sleeve at the same time
- 3 Then pull couplings apart

